



Ematic Model FTABMP2 Screen Replacement

This guide will show you how to replace the screen of the Ematic Model FTABMP2.

Written By: Timothy






TOOLS:



- [iFixit Opening Tools](#) (1)
-

Step 1 — Screen

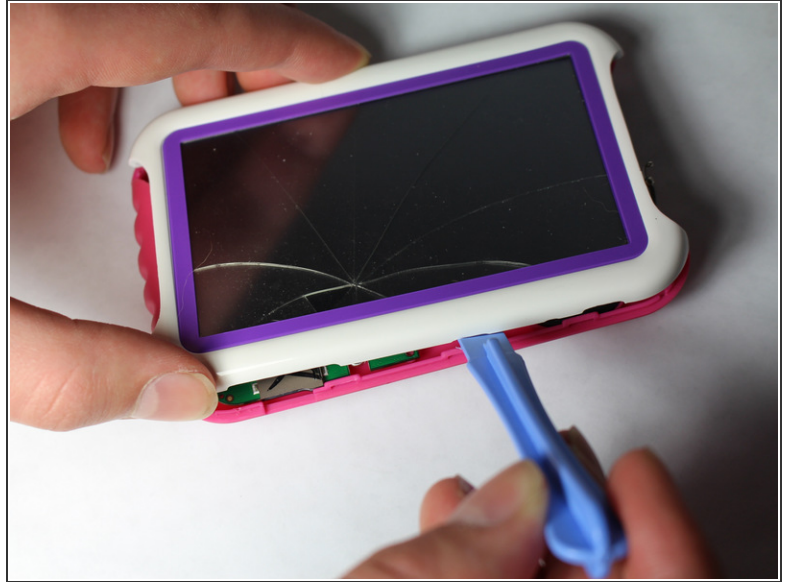


- Use a spudger to pry open the case of your device to reveal the inside.

Step 2

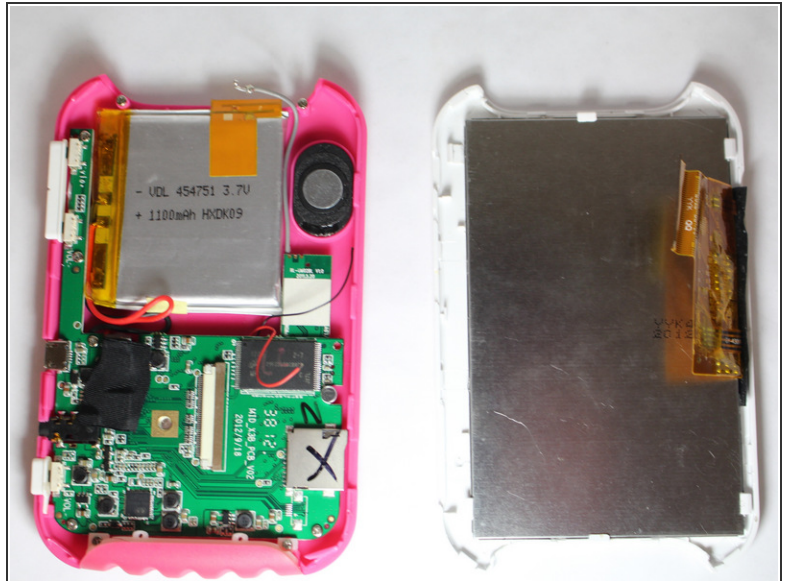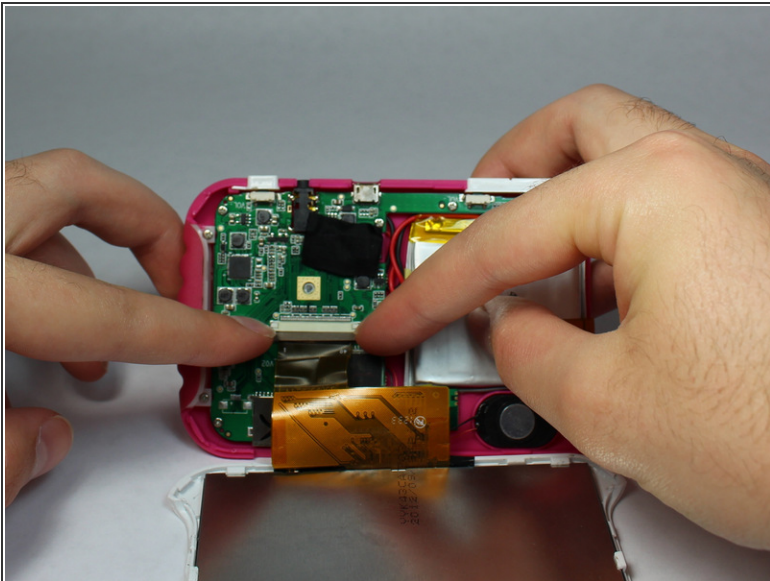

- Disconnect the LCD cable from the motherboard by pressing together the two sides of the clamp to separate the device into two.

Step 3

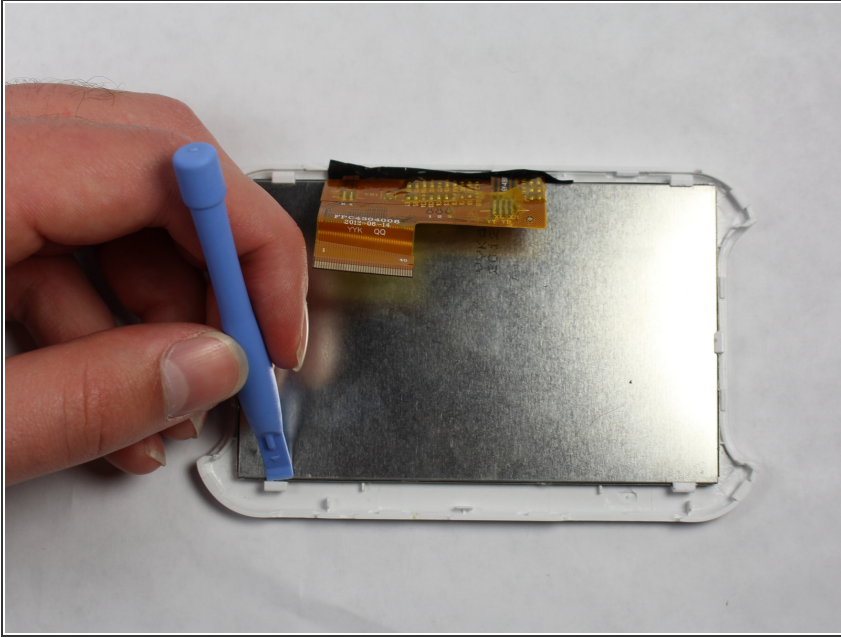

- Use the spudger to pry the LCD from the clamps holding it to the case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 01:11:22 PM.